

0.20 mm Pitch Ultra-low Profile FPC Back-lock Connector


RoHS2

FF26 Series [Upper Contact]

Fujikura

OUTLINE

FF26 series is 0.2mm pitch, depth 3.80mm and 0.66mm connector height.
Ultra-low profile FPC connector .

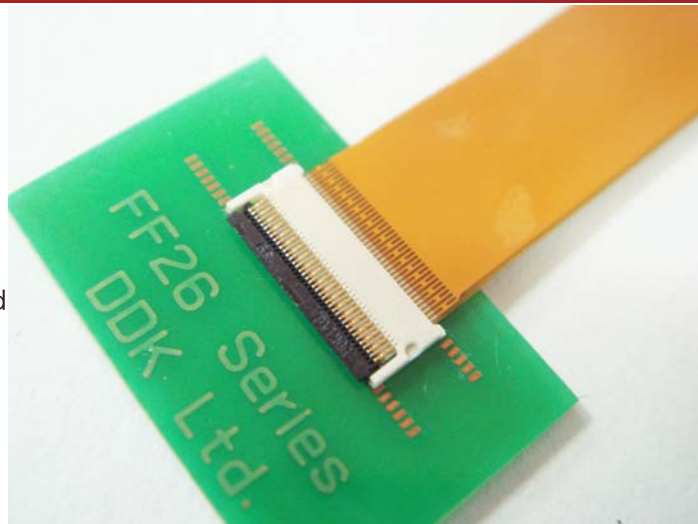

FEATURE

- Original rotate oval cam lock mechanism; "Back-lock" system ensure the reliable connection.
- The contact position is upper contact.
- Back-lock structure ensures retention from inadvertent upward pulling of the FPC.
- Connectors are delivered with the lock lever opened. Time saving for FPC inserting operation.
- Nickel barrier prevents solder wicking.
- Halogen free correspondence presence

Note : Please do not close the lock lever without inserting the FPC.

APPLICATIONS

Mobile phone, Notebook PC, PDA, other Portable devices

SPECIFICATIONS

Rated Voltage	50V AC (r.m.s.)
Rated Current	0.2A / Contact
Dielectric Withstand Voltage	200V AC (r.m.s.) / 1 minute
Insulation Resistance	50 M Ω min. at 250V DC
Contact Resistance	80m Ω max.

MATERIAL/FINISH



Item	Material / Finish
Contact	Copper Alloy / Au (Flash) over Ni
Housing	LCP Resin (UL94V-0) / Ivory
Lock lever	PPS Resin (UL94V-0) / Black

© Specifications and/or dimensions in this catalog are subject to change without notice.

250227 Please verify the latest specifications with our drawings.

<https://www.connector.fujikura.com>

▶ 0.20mm Pitch FPC Connector (Upper Contact)


FF26- A-R 1 1 A-3J

① ② ③ ④ ⑤ ⑥ ⑦ ⑧

① Series	FF26
② Number of Contact	Refer to th table 1
③ Contact Position	A : Upper Contact Applicable PCB Thickness : 0.12±0.03mm
④ Contact Style	R : Right Angle
⑤ Contact Tail Length	1 : 0.30mm
⑥ Contact Plating	1 : Au (Flash) over Ni
⑦ Lock Lever Style	A : Standard B : Long Type
⑧ Material	3J : Halogen-free,PFAS Free


Dimensions

Odd Number of Contact

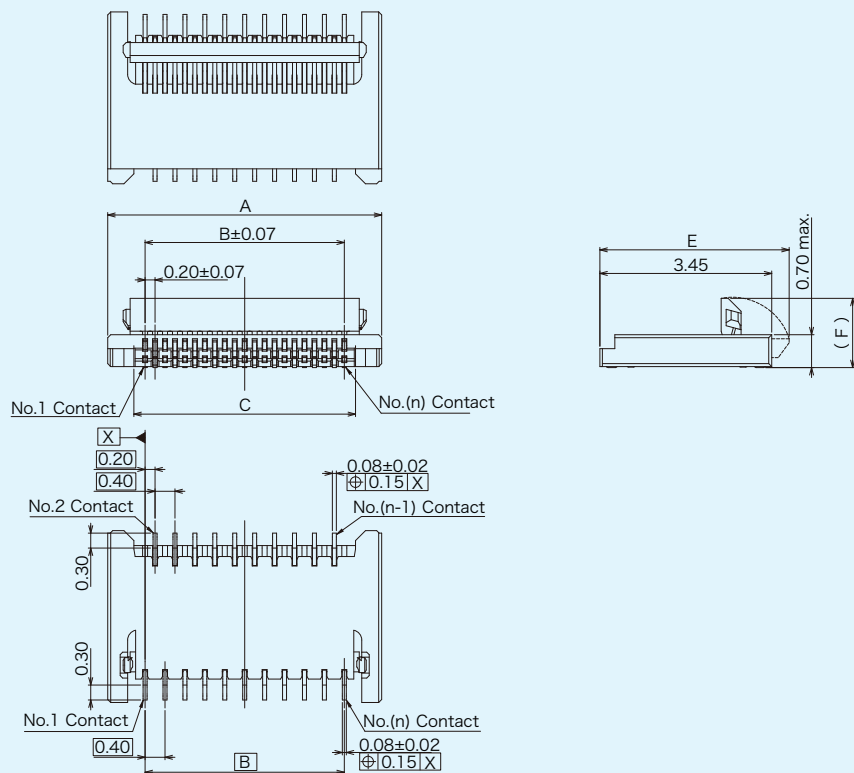


Recommended PCB Mounting Dimensions

Contacts are arranged zigzag on from No.1 contact.

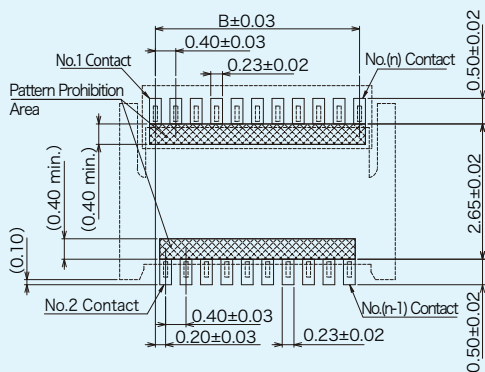

Recommended FPC Dimensions

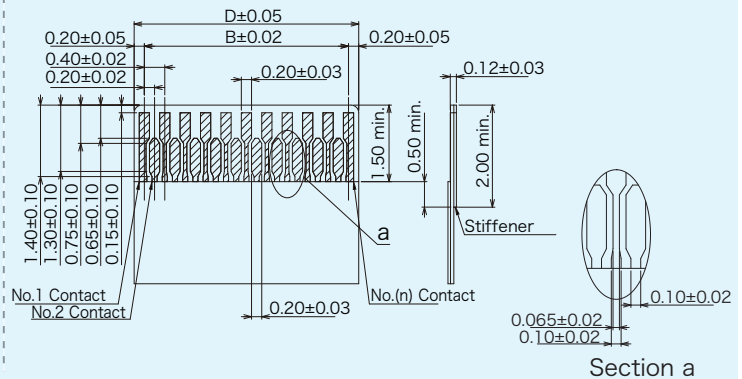


© Specifications and/or dimensions in this catalog are subject to change without notice.
Please verify the latest specifications with our drawings.

▶ 0.20mm Pitch FPC Connector (Upper Contact)


Dimensions

Even Number of Contacts

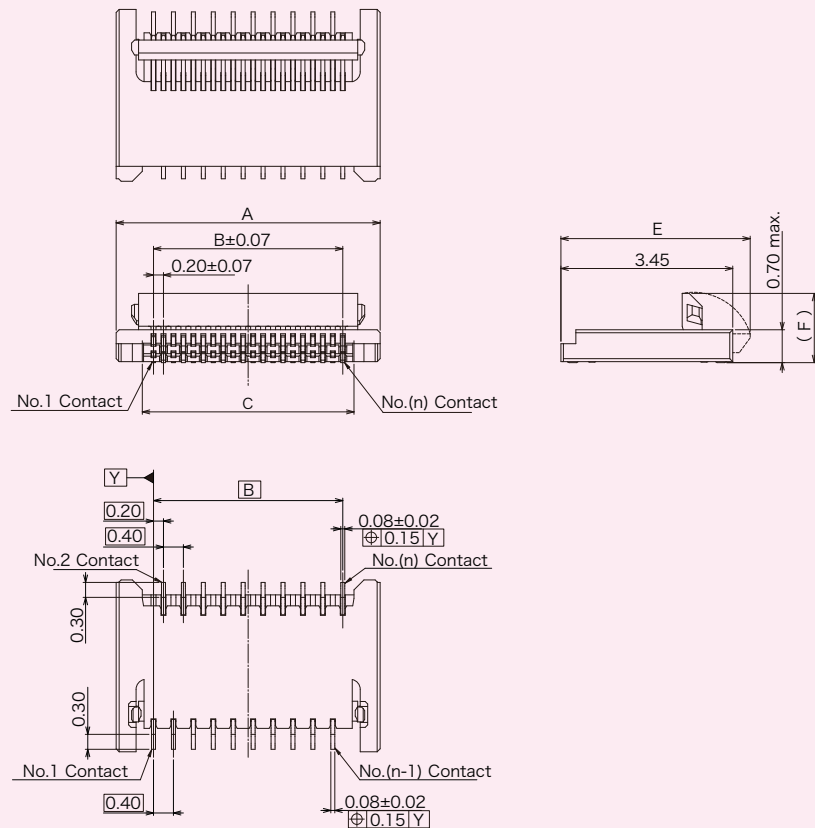

Recommended PCB Mounting Dimensions

Contacts are arranged zigzag from No.1 contact.

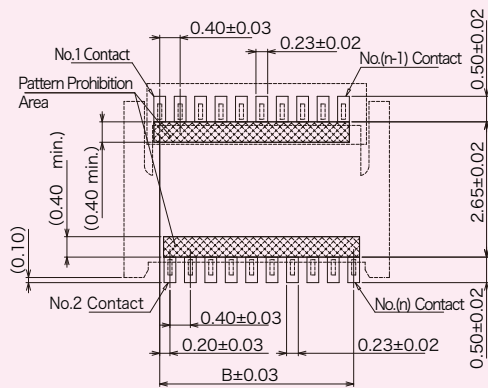

Recommended FPC Dimensions


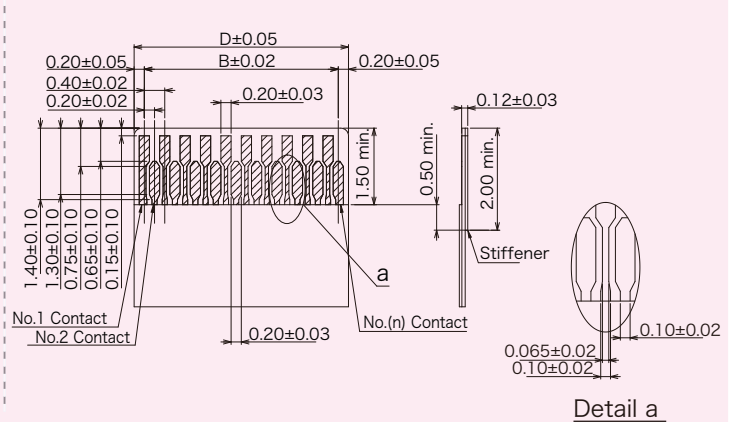


Table-1


Part Number	Number of Contact	A	B	C	D	E	F
FF26-39A-R11A-3J	39	9.10	7.60	8.05	8.00	3.80	(1.39)
FF26-80A-R11B-3J	80	17.30	15.80	16.25	16.20	4.00	(1.59)

Package Specifications

Reel Dimensions

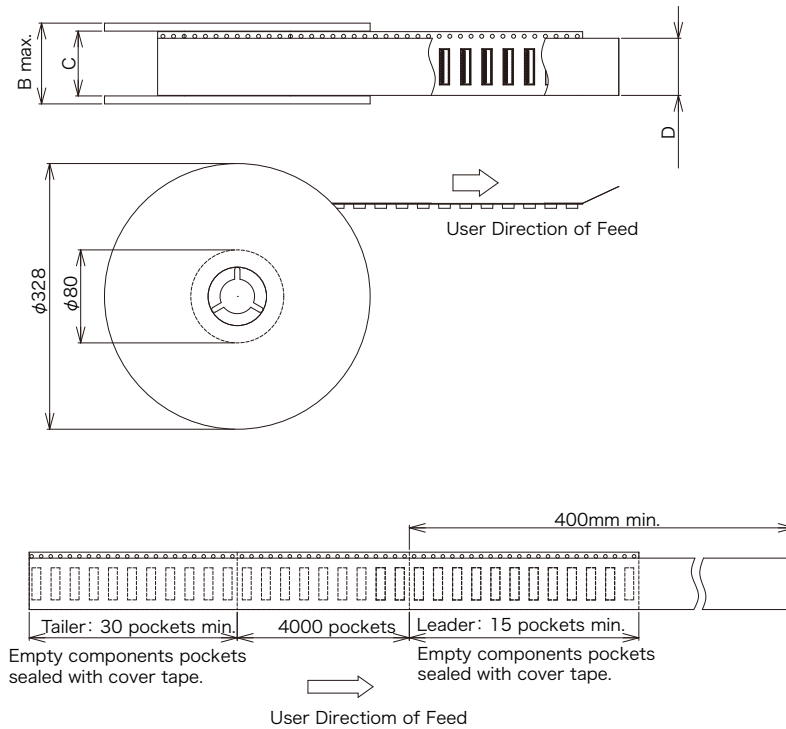

Emboss tape Dimensions

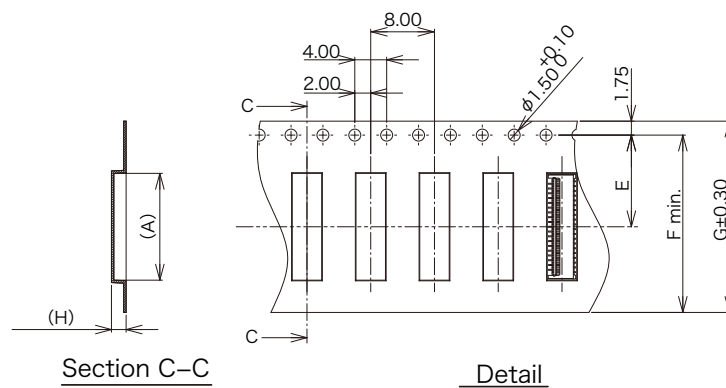

Part Number	Number of Contact	A	B	C	D	E	F	G	H
FF26-39A-R11A-3J	39	9.40	30.4	24.4	21.5	11.5	22.3	24.0	(1.84)
FF26-80A-R11B-3J	80	17.6	38.4	32.4	25.5	14.2	28.4	32.0	(2.04)

Quantity : 4000pcs./ Reel