

3.81/5.08mm Pitch Cable to Cable / Cable to Board Connector

RoHS2

DK-3000 Series

Fujikura

OUTLINE

DK-3000 series is 3.81 / 5.08 mm pitch cable to cable / cable to board connector for industrial signal relay and power supply.

Contacts are crimp type for easy termination.

(PCB mounting type is DIP termination.)

Locking mechanism enables to ensure full mating audibly.

APPLICATIONS

- Robotics, Servo Motor
- Medical, Communication, Office automation



SPECIFICATIONS

Housing Type	DK-3100	DK-3200	DK-3500
Rated Voltage	250V AC(r.m.s.)	600V AC(r.m.s.)	600V AC(r.m.s.)
Dielectric Withstanding Voltage	1500V AC(r.m.s.)	2200V AC(r.m.s.)	2200V AC(r.m.s.)
Insulation Resistance	1000M Ω min. at 500VDC		
Contact Resistance	10 mΩ max.		
Operating Temperature	-55°C ~ 105°C		
Contact Pitch	3.81mm	5.08mm	5.08mm

Number of Contact	Rated Current						
	Applicable Wire Size (AWG)						
	16	18	20	22	24	26	28
2	13A	11A	9A	7A	6A	5A	4A
3	12A	10A	8A	7A	6A	5A	4A
4	11A	10A	8A	7A	5A	5A	4A
6	9A	9A	7A	6A	5A	4A	4A
8	9A	8A	7A	5A	4A	4A	3A
10	8A	8A	6A	5A	4A	3A	3A
12	8A	8A	6A	5A	4A	3A	3A
16	8A	7A	6A	4A	4A	3A	3A
20	8A	7A	6A	4A	4A	3A	2A



MATERIAL / FINISH

Item	Material / Finish
Contact	Copper Alloy / Contact Area : Au over Ni Plating Tail Area : Sn-Ag Plating
Housing	PBT Resin (UL94V-0) / Black
Board Lock	Copper Alloy / Sn-Ag Plating

SAFETY STANDARD



Accreditation Organization	Applicable Standards	Certification Number
TUV	DIN VDE 0627 < EN61984 >	R50053665
UL	UL 1977	E72124


© Specifications and/or dimensions in this catalog are subject to change without notice.
Your checking the latest specifications with our drawings would be highly appreciated.



DK-3100S (Single Row Type)


Housing Type

Receptacle Housing




Receptacle Contact

Tab Housing

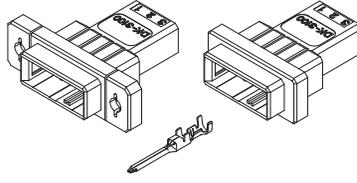

Tab Contact

Tab Header (PCB Mounting Type)




Panel Mounting Type Free Hanging Type

Horizontal Type Vertical Type

Number of Contact	Keying	Receptacle Housing	Tab Housing		Tab Header (PCB Mounting Type)	
			Panel Mounting Type	Free Hanging Type	Horizontal Type	Vertical Type
3	X	DK-3100S-03R	DK-3100S-03P	DK-3100S-03F	DK-3100S-03H-FA	DK-3100S-03V-FA
	Y	DK-3100S-03RY	DK-3100S-03PY	DK-3100S-03FY	DK-3100S-03HY-FA	Dk-3100S-03VY-FA
4	X	DK-3100S-04R	DK-3100S-04P	DK-3100S-04F	DK-3100S-04H-FA	DK-3100S-04V-FA
	Y	DK-3100S-04RY	DK-3100S-04PY	DK-3100S-04FY	DK-3100S-04HY-FA	DK-3100S-04VY-FA
5	X	DK-3100S-05R	DK-3100S-05P	DK-3100S-05F	DK-3100S-05H-FA	DK-3100S-05V-FA
	Y	DK-3100S-05RY	DK-3100S-05PY	DK-3100S-05FY	DK-3100S-05HY-FA	DK-3100S-05VY-FA
6	X	DK-3100S-06R			DK-3100S-06H-FA	DK-3100S-06V-FA
	Y	DK-3100S-06RY			DK-3100S-06HY-FA	DK-3100S-06VY-FA
8	X	DK-3100S-08R	DK-3100S-08P	DK-3100S-08F	DK-3100S-08H-FA	DK-3100S-08V-FA
	Y	DK-3100S-08RY	DK-3100S-08PY	DK-3100S-08FY	DK-3100S-08HY-FA	DK-3100S-08VY-FA
10	X	DK-3100S-10R	DK-3100S-10P	DK-3100S-10F	DK-3100S-10H-FA	DK-3100S-10V-FA
	Y	DK-3100S-10RY	DK-3100S-10PY	DK-3100S-10FY	DK-3100S-10HY-FA	DK-3100S-10VY-FA

Keying




Receptacle Housing

P/N : DK-3100S-03R □



Keying
No Digit : X Key
Y : Y Key

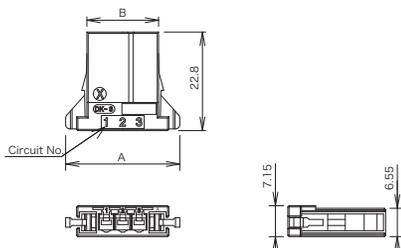


Number of Contact	Part Number	A	B
3	DK-3100S-03R □	26.76	16.70
4	DK-3100S-04R □	30.41	20.51
5	DK-3100S-05R □	34.38	24.32
6	DK-3100S-06R □	38.19	28.13
8	DK-3100S-08R □	45.81	35.75
10	DK-3100S-10R □	53.43	43.37

© Specifications and/or dimensions in this catalog are subject to change without notice.
Your checking the latest specifications with our drawings would be highly appreciated.

▶ Tab Housing

Panel Mounting Type


P/N : DK-3100S-03P □

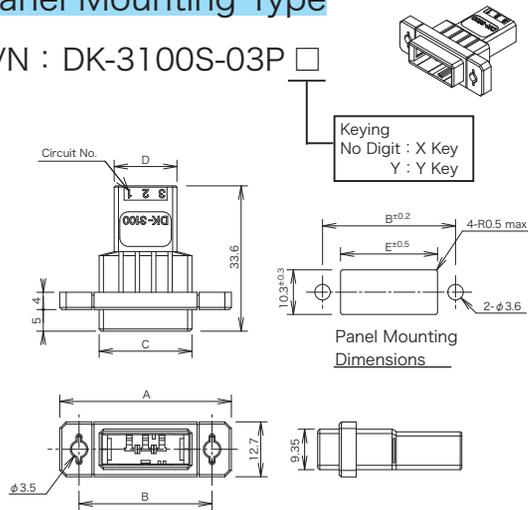

Number of Contact	Part Number	A	B	C	D	E
3	DK-3100S-03P □	40	31	21.62	14.62	22.6
4	DK-3100S-04P □	44	35	25.43	18.43	26.4
5	DK-3100S-05P □	47	38	29.24	22.24	30.2
8	DK-3100S-08P □	59	50	40.67	33.67	41.6
10	DK-3100S-10P □	67	58	48.29	41.29	49.2

Free Hanging Type

P/N : DK-3100S-03F □

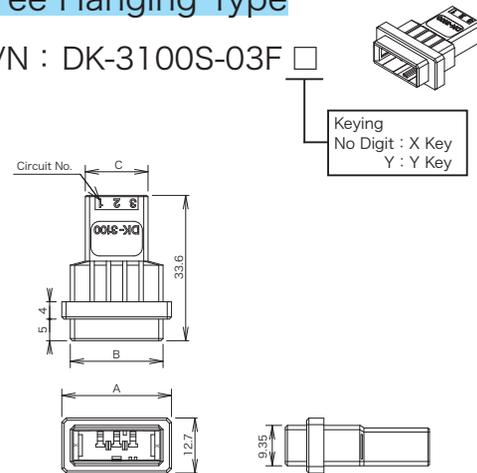


Number of Contact	Part Number	A	B	C
3	DK-3100S-03F □	25.57	21.62	14.62
4	DK-3100S-04F □	27.81	25.43	18.43
5	DK-3100S-05F □	33.19	29.24	22.24
8	DK-3100S-08F □	44.62	40.67	33.67
10	DK-3100S-10F □	50.29	48.29	41.29

▶ Tab Header (PCB Mounting Type)

Horizontal Type


P/N : DK-3100S-03H □ -FA

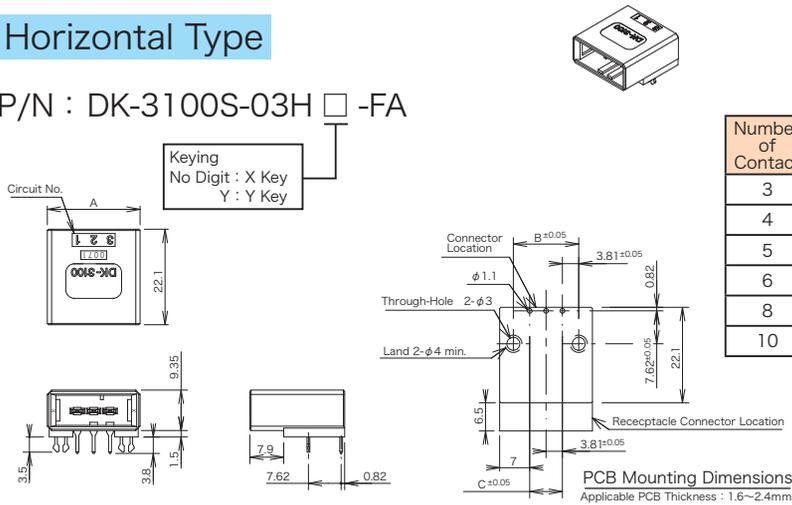

Number of Contact	Part Number	A	B	C
3	DK-3100S-03H □ -FA	21.62	15.24	7.62
4	DK-3100S-04H □ -FA	25.43	19.05	11.43
5	DK-3100S-05H □ -FA	29.24	22.86	15.24
6	DK-3100S-06H □ -FA	33.05	26.67	19.05
8	DK-3100S-08H □ -FA	40.67	34.29	26.67
10	DK-3100S-10H □ -FA	48.29	41.91	34.29

Vertical Type

P/N : DK-3100S-03V □ -FA

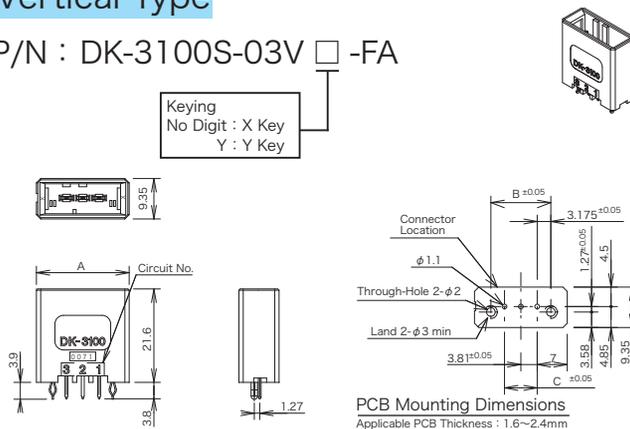



Number of Contact	Part Number	A	B	C
3	DK-3100S-03V □ -FA	21.62	13.97	7.62
4	DK-3100S-04V □ -FA	25.43	17.78	11.43
5	DK-3100S-05V □ -FA	29.24	21.59	15.24
6	DK-3100S-06V □ -FA	33.05	25.40	19.05
8	DK-3100S-08V □ -FA	40.67	33.02	26.67
10	DK-3100S-10V □ -FA	48.29	40.64	34.29

© Specifications and/or dimensions in this catalog are subject to change without notice.
Your checking the latest specifications with our drawings would be highly appreciated.

▶ Tab Housing

Free Hanging Type

P/N : DK-3100D-06F

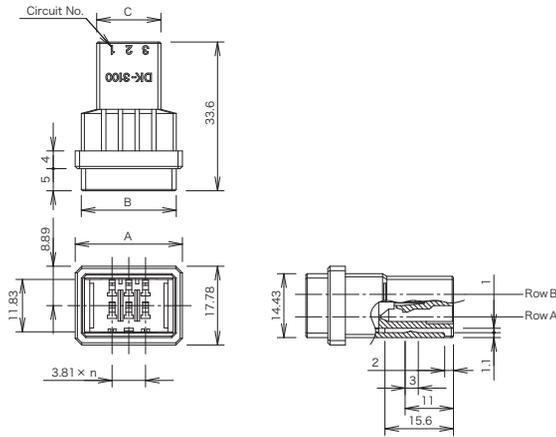


Number of Contact	Part Number	A	B	C
6	DK-3100D-06F	24.40	21.62	14.62
10	DK-3100D-10F	32.02	29.24	22.24
12	DK-3100D-12F	35.83	33.05	26.05
16	DK-3100D-16F	43.45	40.67	33.67
20	DK-3100D-20F	51.07	48.29	41.29


▶ Tab Header(PCB Mounting Type)

Horizontal Type

P/N : DK-3100D-06H-FA


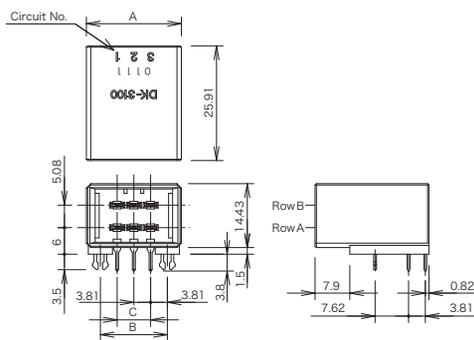


Number of Contact	Part Number	A	B	C
6	DK-3100D-06H-FA	21.62	15.24	7.62
10	DK-3100D-10H-FA	29.24	22.86	15.24
12	DK-3100D-12H-FA	33.05	26.67	19.05
16	DK-3100D-16H-FA	40.67	34.29	26.67
20	DK-3100D-20H-FA	48.29	41.91	34.29

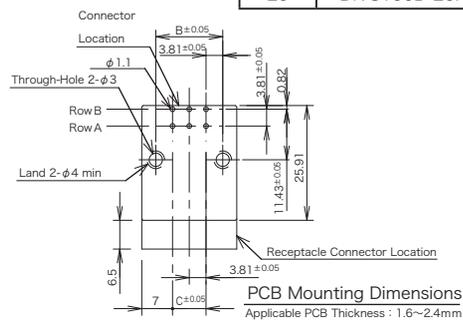


Vertical Type

P/N : DK-3100D-06V-FA



Number of Contact	Part Number	A	B	C
6	DK-3100D-06V-FA	21.62	13.97	7.62
10	DK-3100D-10V-FA	29.24	21.59	15.24
12	DK-3100D-12V-FA	33.05	25.40	19.05
16	DK-3100D-16V-FA	40.67	33.02	26.67
20	DK-3100D-20V-FA	48.29	40.64	34.29




PCB Mounting Dimensions
Applicable PCB Thickness : 1.6~2.4mm

© Specifications and/or dimensions in this catalog are subject to change without notice.
Your checking the latest specifications with our drawings would be highly appreciated.

▶ DK-3100M (Double Row Type/Line Pitch 7.62mm)

Housing Type

Receptacle Housing



Receptacle Contact

Tab Header (PCB Mounting Type)




Horizontal Type



Vertical Type

Number of Contact	Keying	Receptacle Housing	Tab Header (PCB Mounting Type)	
			Horizontal Type	Vertical Type
6	XX	DK-3100M-06R	DK-3100M-06H-FA	DK-3100M-06V-FA
	YY	DK-3100M-06RYY	DK-3100M-06HY-FA	DK-3100M-06VYY-FA
	XY	DK-3100M-06RXY	DK-3100M-06HXY-FA	DK-3100M-06VXY-FA




Keying



▶ Receptacle Housing

P/N : DK-3100M-06R

Keying
No Digit : XX Key
YY : YY Key
XY : XY Key







▶ Tab Header(PCB Mounting Type)

Horizontal Type

P/N : DK-3100M-06H -FA

Keying
No Digit : XX Key
YY : YY Key
XY : XY Key

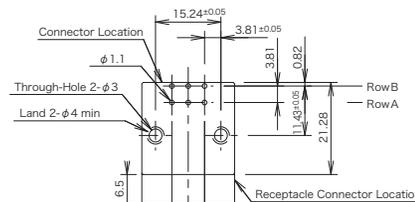

PCB Mounting Dimensions
Applicable PCB Thickness : 1.6~2.4mm

© Specifications and/or dimensions in this catalog are subject to change without notice.
Your checking the latest specifications with our drawings would be highly appreciated.





▶ Tab Header(PCB Mounting Type)

Vertical Type

P/N : DK-3100M-06V □□ - FA



Keying
No Digit : XX Key
YY : YY Key
XY : XY Key


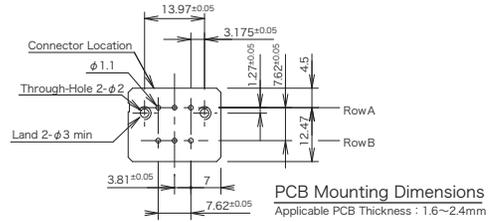





■ Adaptor (3 to 6 Contacts)

P/N : DK-3100S-0306AD

Minimum Ordering Quantity : 100pcs.

Applicable Housing : DK-3100S-03R (Keying : X Key)




DK-3200S (High Voltage Single Row Type)

Housing Type

Receptacle Housing

Tab Housing


Tab Header (PCB Mounting Type)

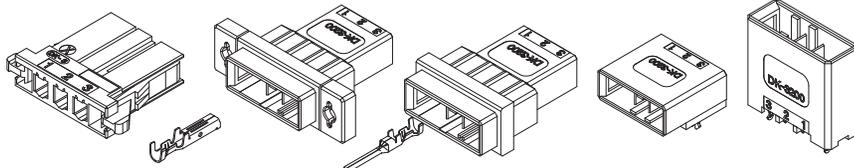

Receptacle Contact Panel Mounting Type Free Hanging Type Horizontal Type Vertical Type
Tab Contact

Number of Contact	Keying	Receptacle Housing	Tab Housing		Tab Header(PCB Mounting Type)	
			Panel Mounting Type	Free Hanging Type	Horizontal Type	Vertical Type
2	X	DK-3200S-02R	DK-3200S-02P	DK-3200S-02F	DK-3200S-02H-FA	DK-3200S-02V-FA
	Y	DK-3200S-02RY	DK-3200S-02PY	DK-3200S-02FY	DK-3200S-02HY-FA	DK-3200S-02VY-FA
3	X	DK-3200S-03R	DK-3200S-03P	DK-3200S-03F	DK-3200S-03H-FA	DK-3200S-03V-FA
	Y	DK-3200S-03RY	DK3200S-03PY	DK-3200S-03FY	DK-3200S-03HY-FA	DK-3200S-03VY-FA
4	X	DK-3200S-04R	DK-3200S-04P	DK-3200S-04F	DK-3200S-04H-FA	DK-3200S-04V-FA
	Y	DK-3200S-04RY	DK-3200S-04PY	DK-3200S-04FY	DK-3200S-04HY-FA	DK-3200S-04VY-FA
5	X	DK-3200S-05R			DK-3200S-05H-FA	DK-3200S-05V-FA
	Y	DK-3200S-05RY			DK-3200S-05HY-FA	DK-3200S-05VY-FA
6	X	DK-3200S-06R			DK-3200S-06H-FA	DK-3200S-06V-FA
	Y	DK-3200S-06RY			DK-3200S-06HY-FA	DK-3200S-06VY-FA

Keying


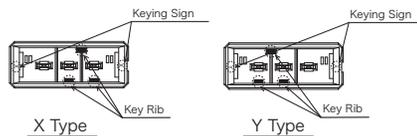


Receptacle Housing

P/N : DK-3200S-03R □

Keying
No Digit : X Key
Y : Y Key

Number of Contact	Part Number	A	B
2	DK-3200S-02R □	24.62	14.16
3	DK-3200S-03R □	29.70	19.24
4	DK-3200S-04R □	34.78	24.32
5	DK-3200S-05R □	39.86	29.40
6	DK-3200S-06R □	44.94	34.48






Tab Housing

Panel Mounting Type



P/N : DK-3200S-03P □

Keying
No Digit : X Key
Y : Y Key

Number of Contact	Part Number	A	B	C	D	E
2	DK-3200S-02P □	36.83	28	19.08	12.08	20
3	DK-3200S-03P □	41.91	33	24.16	17.16	25
4	DK-3200S-04P □	46.99	38	29.24	22.24	30



Panel Mounting Dimensions





© Specifications and/or dimensions in this catalog are subject to change without notice.
Your checking the latest specifications with our drawings would be highly appreciated.

▶ Tab Housing

Free Hanging Type

P/N : DK-3200S-03F □

Keying
No Digit : X Key
Y : Y Key

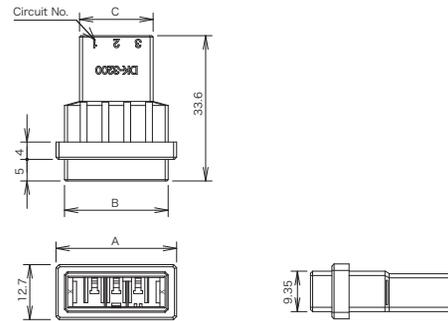


Number of Contact	Part Number	A	B	C
2	DK-3200S-02F □	21.4	19.08	12.08
3	DK-3200S-03F □	26.4	24.16	17.16
4	DK-3200S-04F □	31.4	29.24	22.24

▶ Tab Header(PCB Mounting Type)

Horizontal Type

P/N : DK-3200S-03H □ -FA

Keying
No Digit : X Key
Y : Y Key

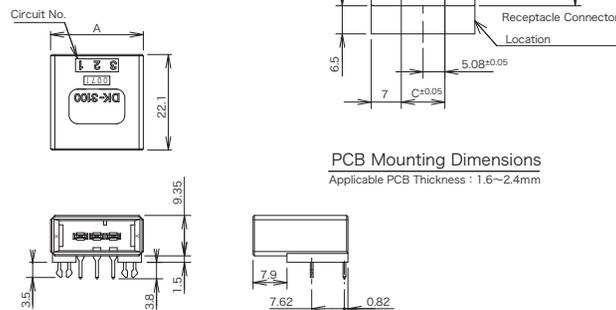



Number of Contact	Part Number	A	B	C
2	DK-3200S-02H □ -FA	19.08	12.70	5.08
3	DK-3200S-03H □ -FA	24.16	17.78	10.16
4	DK-3200S-04H □ -FA	29.24	22.86	15.24
5	DK-3200S-05H □ -FA	34.32	27.94	20.32
6	DK-3200S-06H □ -FA	39.40	33.02	25.40

PCB Mounting Dimensions
Applicable PCB Thickness : 1.6~2.4mm

Vertical Type

P/N : DK-3200S-03V □ -FA

Keying
No Digit : X Key
Y : Y Key



Number of Contact	Part Number	A	B	C
2	DK-3200S-02V □ -FA	19.08	11.43	5.08
3	DK-3200S-03V □ -FA	24.16	16.51	10.16
4	DK-3200S-04V □ -FA	29.24	21.59	15.24
5	DK-3200S-05V □ -FA	34.32	26.67	20.32
6	DK-3200S-06V □ -FA	39.40	31.75	25.40


PCB Mounting Dimensions
Applicable PCB Thickness : 1.6~2.4mm

© Specifications and/or dimensions in this catalog are subject to change without notice.
Your checking the latest specifications with our drawings would be highly appreciated.

DK-3200M (High Voltage Double Row Type/Line Pitch 7.62mm)


Housing Type

Receptacle Housing



Receptacle Contact

Tab Housing

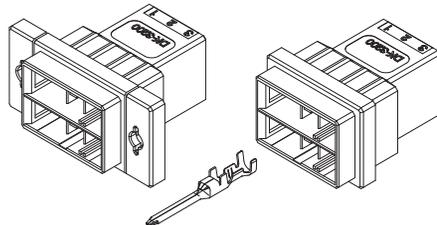


Panel Mounting Type

Tab Contact

Free Hanging Type

Tab Header (PCB Mounting Type)

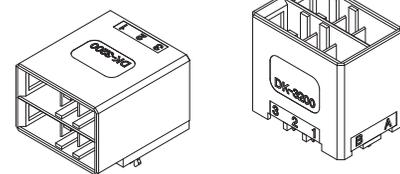


Horizontal Type

Vertical Type

Number of Contact	Keying	Receptacle Housing	Tab Housing		Tab Header(PCB Mounting Type)	
			Panel Mounting Type	Free Hanging Type	Horizontal Type	Vertical Type
6	XX	DK-3200M-06R	DK-3200M-06P	DK-3200M-06F	DK-3200M-06H-FA	DK-3200M-06V-FA
	YY	DK-3200M-06RYY	DK-3200M-06PYY	DK-3200M-06FYY	DK-3200M-06HYY-FA	DK-3200M-06VYY-FA
	XY	DK-3200M-06RXY	DK-3200M-06PXY	DK-3200M-06FXY	DK-3200M-06HXY-FA	DK-3200M-06VXY-FA
10	XX	DK-3200M-10R			DK-3200M-10H-FA	DK-3200M-10V-FA
	YY	DK-3200M-10RYY			DK-3200M-10HYY-FA	DK-3200M-10VYY-FA
	XY	DK-3200M-10RXY			DK-3200M-10HXY-FA	DK-3200M-10VXY-FA
12	XX	DK-3200M-12R	DK-3200M-12P	DK-3200M-12F	DK-3200M-12H-FA	DK-3200M-12V-FA
	YY	DK-3200M-12RYY	DK-3200M-12PYY	DK-3200M-12FYY	DK-3200M-12HYY-FA	DK-3200M-12VYY-FA
	XY	DK-3200M-12RXY	DK-3200M-12PXY	DK-3200M-12FXY	DK-3200M-12HXY-FA	DK-3200M-12VXY-FA
20	XX	DK-3200M-20R	DK-3200M-20P	DK-3200M-20F		





Keying



Receptacle Housing

P/N : DK-3200M-06R □□

Keying
No Digit : XX Key
YY : YY Key
XY : XY Key





Number of Contact	Part Number	A	B
6	DK-3200M-06R □□	27.30	19.24
10	DK-3200M-10R □□	37.46	29.40
12	DK-3200M-12R □□	42.54	34.48
20	DK-3200M-20R	62.86	54.80

Dust Cap

P/N : DK-3200M-06R-CAP

※ Minimum Ordering Quantity : 100 pcs.




Applicable Housing
DK-3200M-06R
DK-3200M-06RYY
DK-3200M-06RXY

© Specifications and/or dimensions in this catalog are subject to change without notice.
Your checking the latest specifications with our drawings would be highly appreciated.


▶ Tab Housing

Panel Mounting Type

P/N : DK-3200M-06P □□




Keying
No Digit : XX Key
YY : YY Key
XY : XY Key

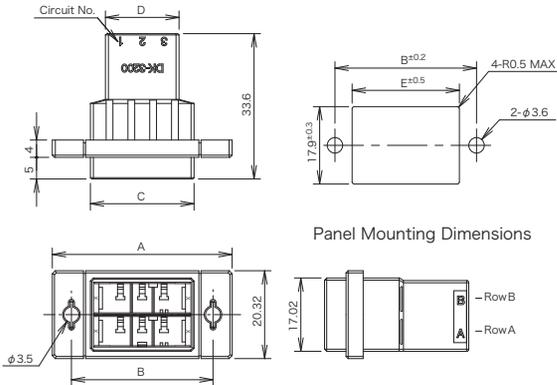


Number of Contact	Part Number	A	B	C	D	E
6	DK-3200M-06P □□	41.91	33	24.16	17.16	25
12	DK-3200M-12P □□	57.91	49	39.40	32.40	41
20	DK-3200M-20P	78.23	70	59.72	52.72	61

Free Hanging Type

P/N : DK-3200M-06F □□



Keying
No Digit : XX Key
YY : YY Key
XY : XY Key

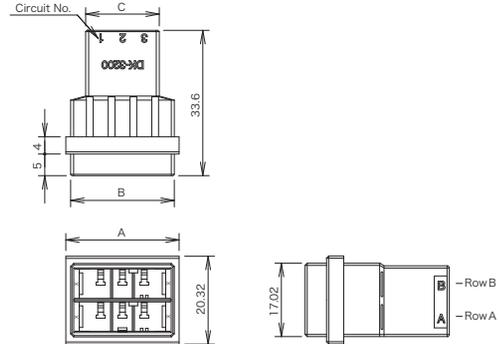


Number of Contact	Part Number	A	B	C
6	DK-3200M-06F □□	26.40	24.16	17.16
12	DK-3200M-12F □□	42.40	39.40	32.40
20	DK-3200M-20F	61.80	59.72	52.72


▶ Tab Header(PCB Mounting Type)

Horizontal Type

P/N : DK-3200M-06H □□ -FA



Keying
No Digit : XX Key
YY : YY Key
XY : XY Key

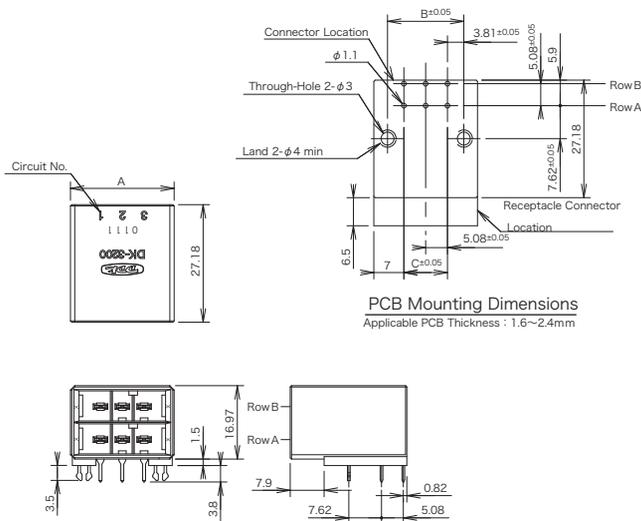


Number of Contact	Part Number	A	B	C
6	DK-3200M-06H □□ -FA	24.16	17.78	10.16
10	DK-3200M-10H □□ -FA	34.32	27.94	20.32
12	DK-3200M-12H □□ -FA	39.40	33.02	25.40

Vertical Type

P/N : DK-3200M-06V □□ -FA



Keying
No Digit : XX Key
YY : YY Key
XY : XY Key

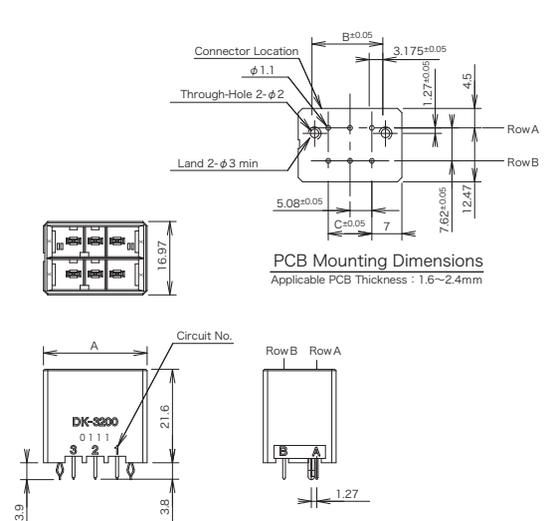


Number of Contact	Part Number	A	B	C
6	DK-3200M-06V □□ -FA	24.16	16.51	10.16
10	DK-3200M-10V □□ -FA	34.32	26.67	20.32
12	DK-3200M-12V □□ -FA	39.40	31.75	25.40

© Specifications and/or dimensions in this catalog are subject to change without notice.
Your checking the latest specifications with our drawings would be highly appreciated.

▶ DK-3500D(High Voltage Double Row Type/Line Pitch 5.08mm)


Housing Type

Receptacle Housing



Receptacle Contact

Tab Housing

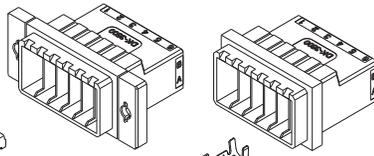


Tab Contact

Panel Mounting Type

Free Hanging Type

Tab Header (PCB Mounting Type)





Horizontal Type

Vertical Type

Number of Contact	Receptacle Housing	Tab Housing		Tab Header (PCB Mounting Type)	
		Panel Mounting Type	Free Hanging Type	Horizontal Type	Vertical Type
2	DK-3500D-02R				
4	DK-3500D-04R				
6	DK-3500D-06R				
10	DK-3500D-10R				
12		DK-3500D-12P	DK-3500D-12F	DK-3500D-12H-FA	DK-3500D-12V-FA
20		DK-3500D-20P	DK-3500D-20F	DK-3500D-20H-FA	DK-3500D-20V-FA

▶ Receptacle Housing

P/N : DK-3500D-04R

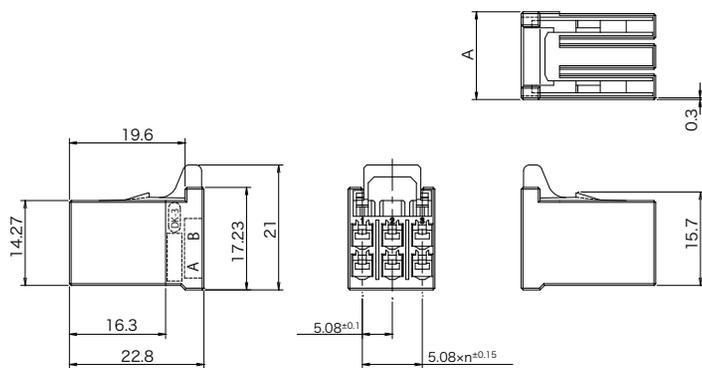



Number of Contact	Part Number	A	n
2	DK-3500D-02R	4.85	-
4	DK-3500D-04R	9.66	1
6	DK-3500D-06R	14.74	2
10	DK-3500D-10R	24.90	4

© Specifications and/or dimensions in this catalog are subject to change without notice.
Your checking the latest specifications with our drawings would be highly appreciated.

▶ Tab Housing

Panel Mounting Type



P/N : DK-3500D-12P

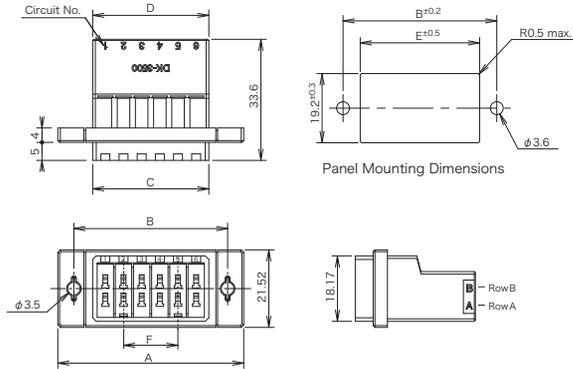

Number of Contact	Part Number	A	B	C	D	E	F
12	DK-3500D-12P	52	43	32.48	32.48	33.4	15.24
20	DK-3500D-20P	72	63	52.80	52.80	53.8	35.56

Free Hanging Type

P/N : DK-3500D-12F

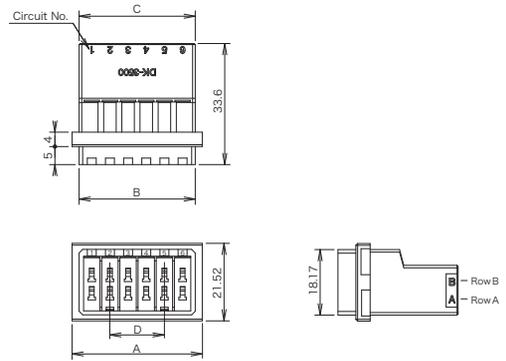



Number of Contact	Part Number	A	B	C	D
12	DK-3500D-12F	36.4	32.48	32.48	15.24
20	DK-3500D-20F	56.4	52.80	52.80	35.56

▶ Tab Header(PCB Mounting Type)

Horizontal Type



P/N : DK-3500D-12H -FA

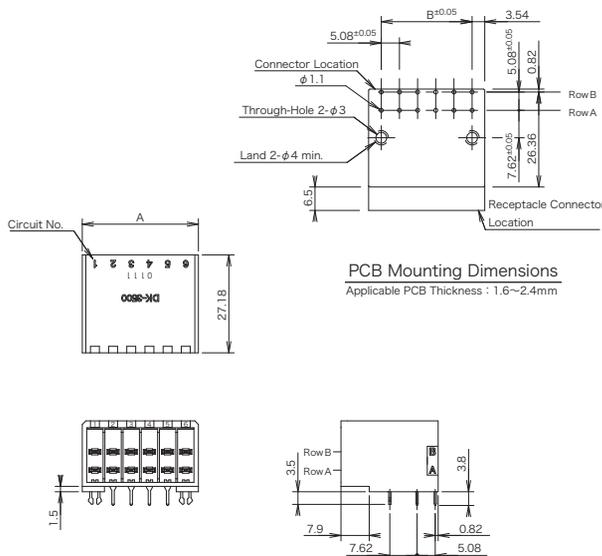

Number of Contact	Part Number	A	B
12	DK-3500D-12H-FA	32.48	25.40
20	DK-3500D-20H-FA	52.80	45.72

Vertical Type

P/N : DK-3500D-12V -FA

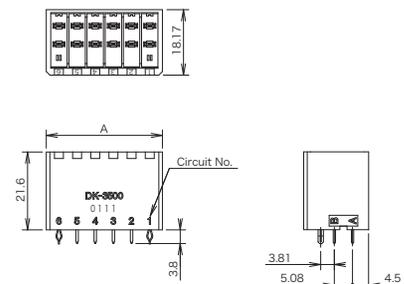

Number of Contact	Part Number	A	B
12	DK-3500D-12V-FA	32.48	25.40
20	DK-3500D-20V-FA	52.80	45.72

© Specifications and/or dimensions in this catalog are subject to change without notice.
Your checking the latest specifications with our drawings would be highly appreciated.

Contact

■ Crimp Contact

Applicable Wire Size		Insulation O.D. (mm)	Contact Size	Package Style	Part Number		Quantity
AWG#	mm ²				Receptacle Contact	Tab Contact	
28	0.08	0.8 ~ 1.2	S	Reel	DK-3RECSST1-4000	DK-3TABSST1 -4000	4,000
26	0.12						
24	0.20			1.0 ~ 1.4	Bag	DK-3RECSLP1 -100	
24	0.20	1.2 ~ 1.6	M	Reel	DK-3RECMST1 -3500	DK-3TABMST1 -3500	3,500
22	0.30						
20	0.50	1.7 ~ 2.6	Bag	DK-3RECMLP1 -100	DK-3TABMLP1 -100	100	
20	0.50	1.8 ~ 2.8	L	Reel	DK-3RECLST1 -3000	DK-3TABLST1 -3000	3,000
18	0.85						
16	1.25	2.2 ~ 2.8	Bag	DK-3RECLLP1 -100	DK-3TABLLP1 -100	100	
14	2.2	2.2 ~ 2.8	2L	Reel	DK-3REC2LST1 -3000	DK-3TAB2LST1 -3000	3,000
16	1.25						
				Bag	DK-3REC2LLP1 -100	DK-3TAB2LLP1 -100	


P/N DK-3RECSST1 - 4000

Contact Plating
 1 : Mating area : Au(0.38 μm min) over Ni Plating
 Other area : Ni Plating

■ Receptacle Contact



■ Tab Contact




■ Keying Plug

P/N : DK-3KP

Keying plug can prevent from mis-mating when using connectors which have same number of contacts.

※ Minimum Ordering Quantity : 100pcs.



 Assembly Tools

Contact Part Number	Applicable Wire Size		Insulation O.D. (mm)	Wire Range Mark	Tool Part Number	
	AWG#	mm ²			Crimp Tool	Applicator
DK-3TABS LP1-100	24 ~ 28	0.08 ~ 0.2	0.8 ~ 1.4	S	357J-23039	
DK-3RECS LP1-100						
DK-3TABS ST1-4000					AP-A52874T (Stripper / Crimper)	
DK-3RECS ST1-4000					AP-A52875T (Crimper)	
DK-3TABMLP1-100	20 ~ 24	0.2 ~ 0.5	1.2 ~ 2.6	M	357J-23038	
DK-3RECMLP1-100						
DK-3TABMST1-3500					AP-A52876T (Stripper / Crimper)	
DK-3RECMST1-3500					AP-A52877T (Crimper)	
DK-3TABLLP1-100	16 ~ 20	0.5 ~ 1.25	1.8 ~ 2.8	L	357J-22112	
DK-3RECLLP1-100						
DK-3TABLST1-3000					AP-A52878T (Stripper / Crimper)	
DK-3RECLST1-3000					AP-A52879T (Crimper)	
DK-3TAB2LLP1-100	14 ~ 16	1.25 ~ 2.2	2.2 ~ 2.8	2L	357J-22113	
DK-3REC2LLP1-100						
DK-3TAB2LST1-3000					AP-A52881T (Crimper)	
DK-3REC2LST1-3000						

■ Contact Extracting Tool

P/N : 357J-23040

※ Contact extracting tool can be extract the contacts from the housing when re-termination